


STEP 1 Pair two of the keeper halves together as shown below and install the single bolt through the keepers and flag grommet keeping the grommet between the two keeper halves. Install nut loosely to keep the assembly together.

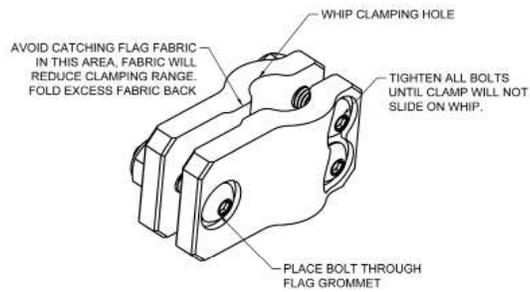

STEP 2 Repeat step one for additional keepers then install the remaining bolts keeping the nuts loose.

STEP 3 Slide the flag and keepers over your whip and adjust placement as desired.

STEP 4 Tighten all bolts evenly until keeper no longer slides on whip. If the clamp does not completely tighten then loosen the single bolt through the flag grommet slightly and tighten the two clamping bolts. Ensure there is no fabric between the two cam areas as shown in the illustration.

PRO TIP To tighten the two close proximity bolts, place a flat blade screwdriver between the locking nuts to keep them from turning then tighten bolts with a hex wrench.